

## CombiTherm

CENTRIFUGAL PUMP FOR THERMAL OIL / HOT WATER APPLICATIONS

### SYSTEM CHARACTERISTICS

The SPX FLOW Johnson Pump CombiTherm is developed especially for thermal oil (DIN 4754) and hot water applications EN12953-6 (DIN 4752) (ratings and dimensions to EN 733 (DIN 24255)). CombiTherm ensures uniform process temperatures while keeping damaging heat away from seal faces and bearings. CombiTherm is designed to require no external cooling when working within the given parameters. The throttle bushing, journal bearing and seal placement reduce circulation and temperature along the pump length. This greatly reduces the temperature at the seal face and bearings.


### APPLICATIONS

The CombiTherm is developed especially for thermal oil and hot water applications: Thermal oil circulation and Heat transfer; Bitumen for roads and roofing; Chemical, agitators, reactors, drying plants, polymerisation; Rubber and plastics, injection moulding, PVC tape; Food, ovens, fish frying, distillation of fatty acids and glycerine, fat softening, potato chips, milk powder plants; Paper, calendar rolls, cardboard. washing machines and driers; High temperature hot water circulation, hospitals, heating systems.

### TECHNICAL DATA


Maximum capacity:	1541 GPM (50 Hz) 1761 GPM (60 Hz)
Maximum delivery head:	361 ft (50 Hz) 525 ft (60 Hz)
Maximum liquid temperature:	Thermal oil 662°F, Hot water 374°F
Maximum operating pressure:	232 PSI
Maximum speed:	3600 rpm

MATERIAL	
PUMP CASING	DUCTILE IRON
IMPELLER, WEAR RING	CAST IRON OR 316 SS
MECHANICAL SEAL COVER	DUCTILE IRON
PUMP SHAFT	17% CHROME STEEL
MECHANICAL SEAL MATERIAL	CARBON/CrMo-STEEL OR CARBON/SiC


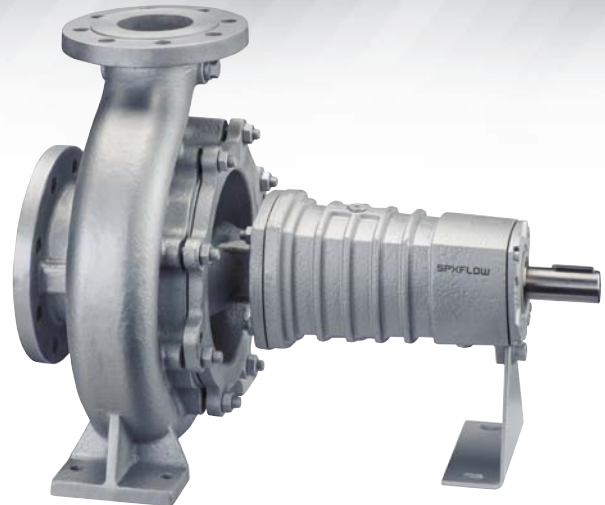


### PUMP SPECIFICS

- Nodular cast iron construction
- Long cooling length displacing seal away from the pumped liquid
- Back vanes and labyrinth prevent solids from reaching bearing and seals
- Product lubricated sleeve bearing
- Standard mechanical seal

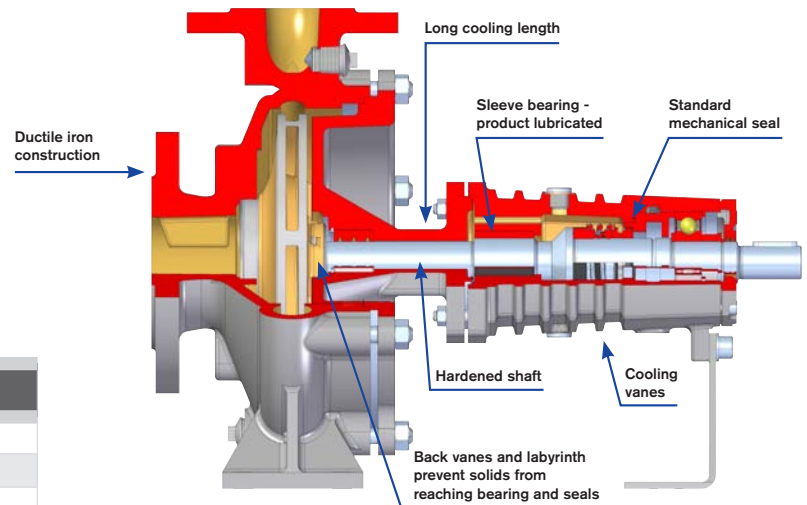


# PERFORMANCE DATA

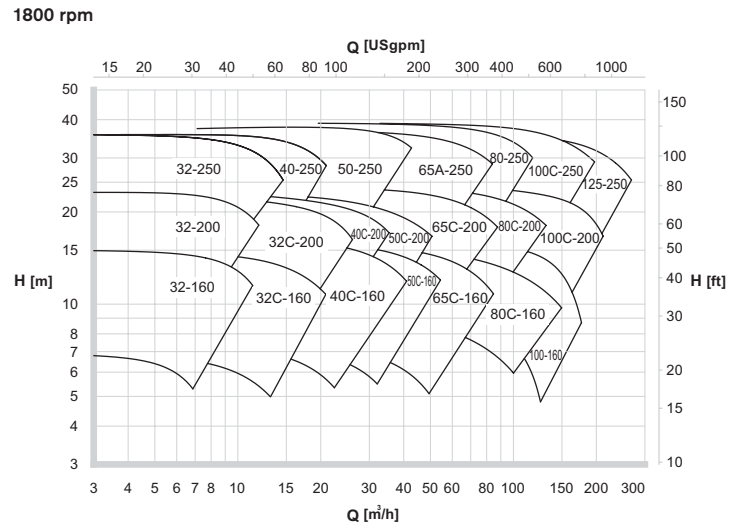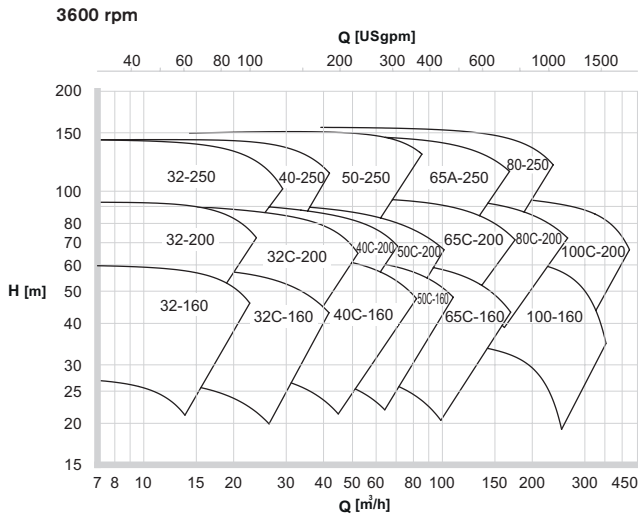

# DIMENSIONS

CAD dimensional drawings available on request.

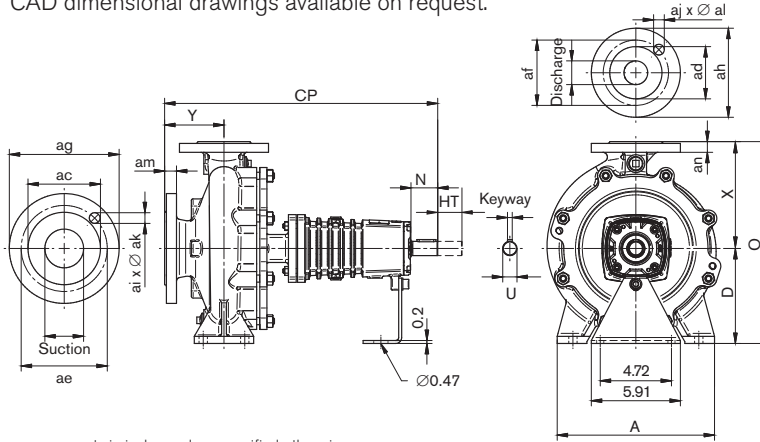

## FLANGES ACCORDING TO ISO 7005 PN16/ ASME B16.5 150 LBS DRILLED (ANSI 150LBS)

Suction	Discharge	ac	ad	ae	af	ag	ah	ai x Ø ak	aj x Ø al	am	an
1.97	1.26	3.62	2.50	4.75	3.50	6.50	5.51	4 X ¾	4 X ¾	0.79	0.71
2.56	1.57	4.12	2.88	5.50	3.88	7.28	5.91	4 X ¾	4 X ¾	0.79	0.71
2.56	1.97	4.12	3.62	5.50	4.75	7.28	6.50	4 X ¾	4 X ¾	0.79	0.79
3.15	2.56	5.00	4.12	6.00	5.50	7.87	7.28	4 X ¾	4 X ¾	0.87	0.79
3.94	3.15	6.19	5.00	7.50	6.00	8.66	7.87	8 X ¾	4 X ¾	0.87	0.87
4.92	3.94	7.31	6.19	8.50	7.50	9.84	8.66	8 X ¾	8 X ¾	0.94	0.87
5.91	4.92	8.50	7.31	9.50	8.50	11.22	9.84	8 X ¾	8 X ¾	0.94	0.94

Flanges according to ISO 7005 PN16 ≅ EN1092-2 available in Europe, the Middle East, Africa and Asia

measurements in inches unless specified otherwise

CT	Suction	Discharge	D	N	Keyway	U	HT	CP	A	Y	O	X	[LBS]
32(C)-160	1.97	1.26	5.20	1.8	0.31	0.94	3.9	17.3	9.4	3.1	11.50	6.30	77.2
32(C)-200	1.97	1.26	6.30	1.8	0.31	0.94	3.9	17.3	9.4	3.1	13.39	7.09	88.2
32-250	1.97	1.26	7.09	1.8	0.31	0.94	3.9	18.1	12.6	3.9	15.94	8.86	134.5
40C-160	2.56	1.57	5.20	1.8	0.31	0.94	3.9	17.3	9.4	3.1	11.50	6.30	81.6
40C-200	2.56	1.57	6.30	1.8	0.31	0.94	3.9	18.1	10.4	3.9	13.39	7.09	97.0
40-250	2.56	1.57	7.09	1.8	0.31	0.94	3.9	18.1	12.6	3.9	15.94	8.86	116.8
50C-160	2.56	1.97	6.30	1.8	0.31	0.94	3.9	18.1	10.4	3.9	13.39	7.09	88.2
50C-200	2.56	1.97	6.30	1.8	0.31	0.94	3.9	18.1	10.4	3.9	14.17	7.87	99.2
50C-250	2.56	1.97	7.09	1.8	0.31	0.94	3.9	18.1	12.6	3.9	15.94	8.86	123.5
65C-160	3.15	2.56	6.30	1.8	0.31	0.94	3.9	18.1	11.0	3.9	14.17	7.87	99.2
65C-200	3.15	2.56	7.09	1.8	0.31	0.94	5.5	18.1	12.6	3.9	15.94	8.86	114.6
65A-250	3.15	2.56	7.87	3.0	0.39	1.26	5.5	22.4	14.2	3.9	17.72	9.84	176.4
80C-160	3.94	3.15	7.09	1.8	0.31	0.94	5.5	19.1	12.6	4.9	15.94	8.86	116.8
80C-200	3.94	3.15	7.09	3.0	0.39	1.26	5.5	23.4	13.6	4.9	16.93	9.84	158.7
80C-250	3.94	3.15	7.87	3.0	0.39	1.26	5.5	23.4	15.7	4.9	18.90	11.02	189.6
100-160	4.92	3.94	7.87	3.0	0.39	1.26	3.9	23.4	14.2	4.9	20.28	12.40	194.0
100C-200	4.92	3.94	7.87	3.0	0.39	1.26	5.5	23.4	14.2	4.9	18.90	11.02	218.3
100C-250	4.92	3.94	8.86	3.0	0.39	1.26	5.5	24.0	15.7	5.5	19.88	11.02	213.8
125-250	5.91	4.92	9.84	3.0	0.39	1.26	5.5	24.0	15.7	5.5	23.82	13.98	271.2

SPX FLOW TECHNOLOGY

**SPXFLOW**

1625 Hunter Road, Suite B Hanover Park, Illinois 60133 USA

Phone: +1 (847) 671 7867 E-Mail: johnson-pump.americas.industrial@spxflow.com

For more information about our worldwide locations, approvals, certifications, and local representatives, please visit [www.spxflow.com](http://www.spxflow.com) and [www.johnson-pump.com](http://www.johnson-pump.com).

SPX FLOW, Inc. reserves the right to incorporate our latest design and material changes without notice or obligation. Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing.

JP\_419USLetterDS\_GB USA Version: 03/2016 Issued: 03/2016

COPYRIGHT © 2016 SPX FLOW, Inc.