


FIP

Flexible Impeller Pumps

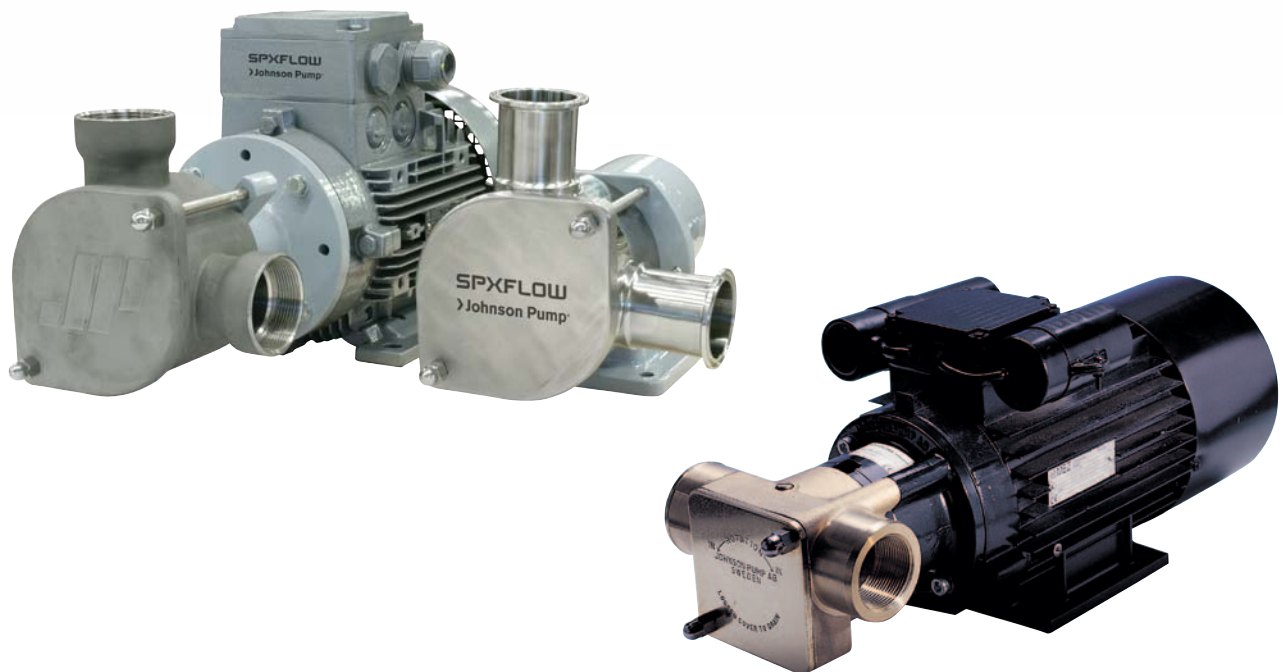

CE

SPX FLOW, with the Johnson Pump brand has a long and broad experience of the design and manufacture of flexible impeller pumps. Our pumps have always stood for innovation and quality with strong emphasis on the flexible impeller itself – the main reason for the successful growth of Johnson Pump from the start some 40 years ago.

Typical is the development of the first flexible impeller in the world produced, tested and certified according to the FDA (US Food and Drug Administration) milk compound formulation. The formulation comprises all types of foodstuffs.

Today SPX FLOW Johnson Pump offers one of the market's most extensive flexible impeller pump programs for industrial and marine use.

Based in Charlotte, North Carolina, SPX FLOW (NYSE: FLOW) is a multi-industry manufacturing company with operations in more than 35 markets worldwide. SPX FLOW's innovative, world-class products and highly-engineered solutions are helping to meet the needs of a constantly developing world and growing global population. You'll find our innovative solutions in everything from dairy plants and power plants to oil and gas pipelines, and the power grid. SPX FLOW is really everywhere you look.

We help our customers around the globe expand and enhance their food and beverage, power and energy and industrial production processes. For more information, please visit www.spxflow.com

The FIP-range Easy-to-maintain positive displacement pump with excellent self-priming ability

- Extremely gentle product handling
- Evacuates air and gas
- Fully reversible
- Easy to clean and maintain
- Compact design
- Close coupled or pedestal mount
- Can pump liquids with non-abrasive solids



EXCELLENT SELF-PRIMING CAPACITY

FIP-pump creates a negative pressure, and does not require priming or filling if there is gas or air inside the liquid or system. A dry pump has a suction lift up to 16 feet/5 meters within a few seconds.

PULSATION FREE AND REVERSIBLE FLOW

The FIP-pump gives a uniform flow without pulsation. By regulating the speed of the FIP, you can easily control the flow. The pump is fully reversible.

COMPACT DESIGN

The FIP has minimal outer dimensions compared to its capacity, which simplifies space and installation requirements.


The FIP product line is available close coupled to an IEC frame motor or pedestal mount for conventional in-line pump and drive arrangement.

EASY MAINTENANCE AND FAST TO CLEAN


Unique 3 piece design reduces maintenance and cleaning time to a minimum. The pump cover is easily removed, providing full access to the impeller. Down-time is further reduced with no need to disconnect the pump from piping system.

Impellers available in Nitrile, EPDM, Neoprene, along with FDA approved food grade EPDM and Neoprene elastomers.

Typical product applications

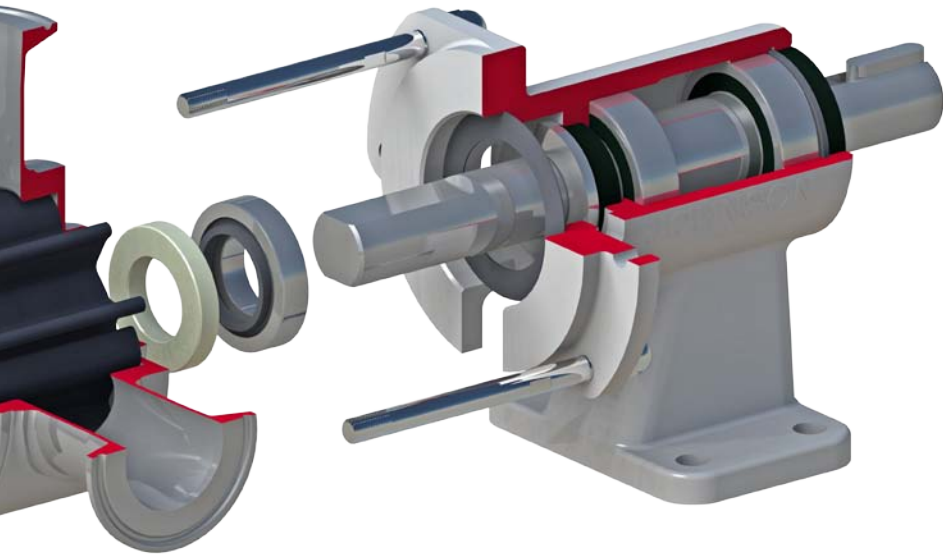

OPERATING PRINCIPLE

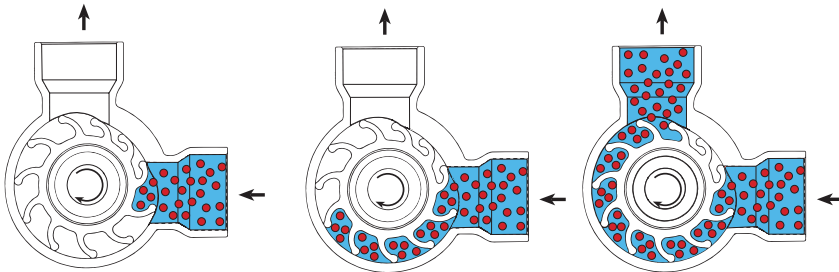

Due to the eccentric interior cross-section of the pump body, a partial vacuum is created as the volume increases between the flexible impeller wings at the inlet port. The resulting suction draws the liquid into the pump.

The rotating impeller carries the liquid from the inlet towards the outlet port. During this part of the cycle, the volume between the wings remains virtually constant. The distance between the wings allows non-abrasive solids to pass through the pump without damaging the particles or pump.

The liquid is discharged from the pump in a continuous, uniform flow when the wings bend, thus decreasing the volume between them, as they come into contact with the flattened part of the eccentric interior walls of the body.



FIP STAINLESS STEEL INDUSTRIAL VERSION

Available in either close coupled flange or conventional pedestal mount. 316 stainless steel pump with BSP or NPT threads suitable for non hygienic applications:



Pet food slurry, Brine injection, Flocculants, Detergents, Sampling, Sludge with air, Water based glues/paints, Glycols, Glycerine, Dyes



FIP STAINLESS STEEL HYGIENIC VERSION

Polished 316 stainless steel with a variety of hygienic connections and different food or milk grade impellers according to FDA regulations. Available in either close coupled flange or conventional pedestal mount. Typical applications include: Milk, Cream, Curd, Yogurt, Whey, Condiments, Gelatine, Jams, Dressing, Canned foods, Soft drinks, Wine, Beer, Fruit juices, Flavourings, Edible oils, Batter, Brine injection, Cosmetics

CAPACITY DATA BASED ON WATER AT 68 °F / 20°C – 1750 RPM

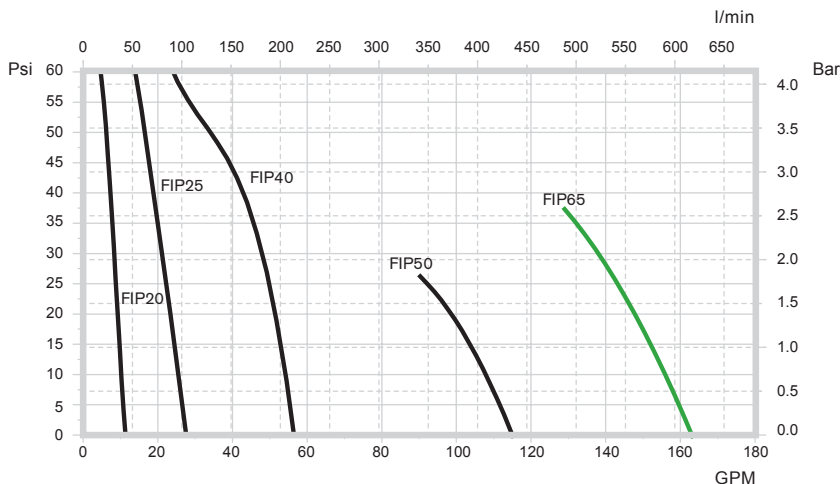

FIP BRONZE VERSION

Bronze pump with BSP threads for liquids such as: Saltwater, Mineral oils, Slurries, Additives or Abrasive products

FIP

Flexible Impeller Pumps

SPXFLOW

Your local contact:

www.spxflow.com/en/johnson-pump/where-to-buy/

SPX FLOW TECHNOLOGY SWEDEN AB

Nastagatan 19, P.O. Box 1436 • SE-701 14 Örebro, SWEDEN

P: +46 (0)19 21 83 00

F: +46 (0)19 27 23 18

E: johnson-pump.se.ComEng@spxflow.com

SPX FLOW TECHNOLOGY

1625 Hunter Road, Suite B

Hanover Park, Illinois, 60133, USA

Phone: +1 (847) 671 7867

E-Mail: johnson-pump.americas.industrial@spxflow.com

SPX FLOW reserves the right to incorporate our latest design and material changes without notice or obligation.

Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing. Please contact your local sales representative for product availability in your region. For more information visit www.spxflow.com and www.johnson-pump.com.

The green ">" is a trademark of SPX FLOW, Inc.

JP_200_USA Version: 02/2016 Issued: 02/2016

COPYRIGHT © 2016 SPX FLOW, Inc.